


KANA KB かさ歯車 NEW


●ご注文方法 商品コード

KB2-40 20

モジュール 歯数 相手方歯数



M3形状



M4形状

i	精度等級	JIS B 1704 3級
i	歯形	グリーソン
i	圧力角	20°
m	材質	機械構造用炭素鋼
h	熱処理	-
h	歯面硬度	HB200以下
s	表面処理	黒染

商品コード	定価 (円)	歯数比	モジュール (m)	歯数	穴径 dH7	ボス径 BD	歯先円直径 Do	基準円直径 Dp	組立距離 C	全長 BL	歯先距離 G	ボス長さ H	穴長さ l	歯幅 T	おさえ面径 K	形状	質量 (kg)	商品コード	
KB1 -4020	1,800	2	1	40	8	25	40.59	40	22	15.07	12.59	8	12	6	26.58	M4	0.07	KB1 -4020	
KB1 -2040	1,000			20	6	16	22.41	20	28	13.78	8.6	7	12	12	6	9.17	M3	0.02	KB1 -2040
KB1.25-4020	2,200		1.25	40	10	32	50.73	50	27	18.54	15.23	10	16	8	33.61	M4	0.14	KB1.25-4020	
KB1.25-2040	1,200			20	8	22	28.01	25	36	18.66	11.75	10.25	17	8	13.22	M3	0.05	KB1.25-2040	
KB1.5 -4020	2,800		1.5	40	10	38	60.88	60	35	25.01	20.88	15	22	10	39.64	M4	0.27	KB1.5 -4020	
KB1.5 -2040	1,400			20	8	25	33.61	30	46	25.54	16.9	14.75	24	10	17.28	M3	0.09	KB1.5 -2040	
KB2 -4020	3,600		2	40	12	40	81.17	80	45	32.37	26.17	18	27	15	48.46	M4	0.51	KB2 -4020	
KB2 -2040	1,800			20	12	32	44.81	40	60	34.16	21.2	18	32	15	20.92	M3	0.19	KB2 -2040	
KB2.5 -4020	4,800		2.5	40	15	50	101.46	100	55	39.73	31.46	20	35	20	60.28	M4	1.1	KB2.5 -4020	
KB2.5 -2040	2,500			20	12	40	56.01	50	75	43.78	26.5	22.5	41	20	24.56	M3	0.40	KB2.5 -2040	
KB3 -4020	7,600		3	40	20	60	121.76	120	65	45.85	36.76	24	38	22	73.81	M4	1.7	KB3 -4020	
KB3 -2040	3,600			20	16	50	67.22	60	90	50.81	31.8	27.5	47	22	29.61	M3	0.70	KB3 -2040	
KB4 -4020	13,800		4	40	20	70	162.34	160	80	53.92	42.34	28	45	28	102.39	M4	3.3	KB4 -4020	
KB4 -2040	6,000			20	20	60	89.62	80	120	66.59	42.41	35	62	28	42.78	M3	1.5	KB4 -2040	
KB1 -4518	2,100		2.5	1	45	8	30	45.46	45	23	16.95	14.57	10	15	7	30.73	M4	0.11	KB1 -4518
KB1 -1845	1,100				18	6	15	20.57	18	32	16.34	10.02	8.9	15.5	7	10.31	M3	0.02	KB1 -1845
KB1.25-4518	2,500	1.25		45	10	34	56.82	56.25	26	18.53	15.46	10	16	9	37.86	M4	0.17	KB1.25-4518	
KB1.25-1845	1,200			18	8	19	25.72	22.5	40	20.66	12.52	11.17	19.5	9	12.16	M3	0.04	KB1.25-1845	
KB1.5 -4518	3,000	1.5		45	10	36	68.18	67.5	30	21.1	17.35	10	18	11	45	M4	0.28	KB1.5 -4518	
KB1.5 -1845	1,300			18	8	23	30.86	27	45	21.97	12.02	10.45	21	11	16.51	M3	0.06	KB1.5 -1845	
KB2 -4518	4,600	2		45	12	48	90.91	90	40	27.91	23.14	15	25	14	62.24	M4	0.65	KB2 -4518	
KB2 -1845	1,700			18	10	32	41.15	36	60	28.69	16.03	14.2	27.5	14	23.11	M3	0.16	KB2 -1845	
KB2.5 -4518	6,600	2.5		45	15	55	113.64	112.5	50	35.06	28.92	18	31	18	76.53	M4	1.2	KB2.5 -4518	
KB2.5 -1845	2,200			18	12	40	51.44	45	72	33.31	17.04	14.75	31.5	18	26.82	M3	0.28	KB2.5 -1845	
KB3 -4518	9,100	3		45	20	65	136.37	135	60	41.86	34.71	22	37	21	92.96	M4	2.1	KB3 -4518	
KB3 -1845	2,900			18	16	48	61.72	54	85	38.04	19.05	16.3	36	21	33.41	M3	0.46	KB3 -1845	
KB4 -4518	19,000	4		45	20	80	181.82	180	75	51.16	41.28	24	45	29	122.33	M4	4.7	KB4 -4518	
KB4 -1845	5,000			18	20	62	82.3	72	110	48.28	22.06	18	46	29	45.83	M3	1.0	KB4 -1845	

※KANAギヤセットでのご使用を推奨いたします。


KANA

KB かさ歯車 NEW


●ご注文方法 商品コード

KB2-45 15


モジュール 歯数 相手方歯数



M3形状



M4形状

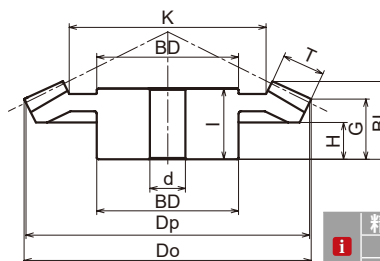

M5形状

i	精度等級	JIS B 1704 3級
	歯形	グリーソン
	圧力角	20°
m	材質	機械構造用炭素鋼
h	熱処理	-
	歯面硬度	HB200以下
s	表面処理	黒染

商品コード	定価 (円)	歯数比	モジュール (m)	歯数	穴径 dH7	ボス径 BD	歯先円直径 Do	基準円直径 Dp	組立距離 C	全長 BL	歯先距離 G	ボス長さ H	穴長さ l	歯幅 T	おさえ面径 K	形状	質量 (kg)	商品コード
KB1 -4515	2,000	3	1	45	8	30	45.37	45	17	11.77	10.06	5	9	6	32.02	M4	0.08	KB1 -4515
KB1 -1545	950			15	6	12	17.67	15	29	12.51	6.95	6	12	10.05	M3	0.10	KB1 -1545	
KB1.25-4515	2,400		1.25	45	10	34	56.72	56.25	21	14.61	12.33	6	12	8	39.63	M4	0.15	KB1.25-4515
KB1.25-1545	1,000			15	8	15	22.09	18.75	36	15.85	8.43	7.25	15	10.9	M3	0.02	KB1.25-1545	
KB1.5 -4515	3,100		1.5	45	10	36	68.06	67.5	28	20.44	17.59	11	17	10	46.58	M4	0.25	KB1.5 -4515
KB1.5 -1545	1,100			15	8	18	26.54	22.5	47	23.19	13.92	12.5	22.5	14.75	M3	0.04	KB1.5 -1545	
KB2 -4515	4,400		2	45	12	40	90.75	90	40	30.4	26.12	17	26	15	59.04	M4	0.60	KB2 -4515
KB2 -1545	1,400			15	10	24	35.35	30	60	29.8	15.89	14	29	19.13	M3	0.10	KB2 -1545	
KB2.5 -4515	6,400		2.5	45	15	50	113.43	112.5	50	38.35	32.65	22	35	20	72.84	M4	1.2	KB2.5 -4515
KB2.5 -1545	1,700			15	12	30	44.18	37.5	75	38.41	19.86	17.5	37	20.51	M3	0.19	KB2.5 -1545	
KB3 -4515	8,300		3	45	20	60	136.12	135	55	40.74	34.18	20	35	23	88.18	M4	2.0	KB3 -4515
KB3 -1545	2,400			15	15	38	53.02	45	90	45.17	23.84	21.33	43	22.53	M3	0.34	KB3 -1545	
KB4 -4515	13,800		4	45	20	80	181.5	180	70	50.79	42.24	24	45	30	118.09	M5	3.9	KB4 -4515
KB4 -1545	4,000			15	16	50	70.69	60	115	54.6	26.78	23.33	52	32.26	M3	0.77	KB4 -1545	
KB1.5 -6015	4,600		4	1.5	60	12	50	90.41	90	32	24.20	21.58	12	21	65.38	M4	0.62	KB1.5 -6015
KB1.5 -1560	1,200				15	8	18	26.66	22.5	56	23.01	11.52	10.43	22.5	15.54	M3	0.04	KB1.5 -1560
KB2 -6015	7,400	2		60	15	60	120.55	120	42	31.6	28.1	16	27	16	87.02	M4	1.4	KB2 -6015
KB2 -1560	1,500			15	10	24	35.55	30	75	31.01	15.69	14.25	30	18.06	M3	0.10	KB2 -1560	
KB2.5 -6015	11,300	2.5		60	20	70	150.69	150	53	40	35.63	20	34	20	108.64	M4	2.5	KB2.5 -6015
KB2.5 -1560	1,800			15	12	30	44.44	37.5	94	39.02	19.87	18.06	37.5	20.57	M3	0.21	KB2.5 -1560	
KB3 -6015	16,100	3		60	20	80	180.83	180	64	47.97	43.15	25	41	22	134.4	M4	4.2	KB3 -6015
KB3 -1560	2,600			15	15	38	53.33	45	112	44.1	23.04	21.12	43	31.58	M3	0.36	KB3 -1560	
KB4 -6015	24,100	4		60	25	85	241.1	240	80	59.2	52.2	36	53	32	174.03	M5	6.0	KB4 -6015
KB4 -1560	5,100			15	16	50	71.1	60	150	62.03	31.4	28.75	60	36.12	M3	0.91	KB4 -1560	

※KANAギヤセットでのご使用を推奨いたします。