



HG40B

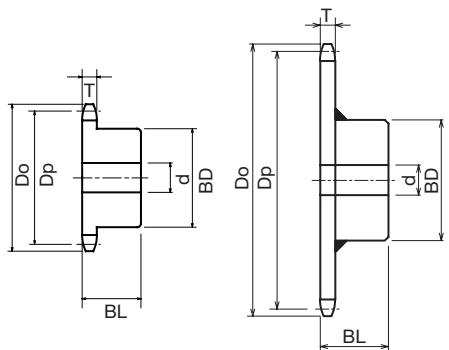

HG High-grade Sprocket with Hardened Teeth B-type

● Order No. Example



- Chain No.40
- Chain Pitch (P)12.70mm
- Roller Link Inner Width (W) 7.95mm
- Roller Outside Diameter (Dr) 7.92mm
- Tooth Width (T) 7.2 mm

- m Carbon Structural Steel
- h High-frequency Hardened Teeth

Type	No. of Teeth	Outer Diameter Do	Pitch Diameter Dp	Shaft Hole Diameter d			Boss Diameter BD	Boss Length BL	Shape	Weight kg	¥	Semi-F ¥
				Prepared Hole Product	Minimum	Maximum						
HG 40B	42H	177	169.95	16	17	48	73	32	Ground Specification	2.05		
	45H	189	182.06	16	17	48	73	32		2.25		
	47H	197	190.14	16	17	48	73	32		2.37		
	48H	201	194.18	16	17	48	73	32		2.45		
	50H	209	202.26	16	17	48	73	32		2.60		
	54H	226	218.42	16	17	48	73	32	Welded Specification	2.90		
60H	250	242.66	16	17	48	73	32	3.40				

Sprocket No.

and Quantity

Same-day shipping

Postage

Guide

* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.