

HG60-2B




HG High-grade Sprocket with Hardened Teeth Two-row B-type

● Order No. Example


HG60-2B

30H

Type

No. of Teeth

Sprocket No.

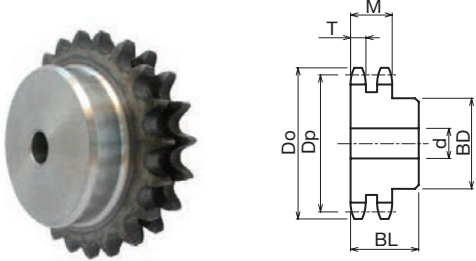

- Chain No.60-2
 - Chain Pitch (P)19.05mm
 - Roller Link Inner Width (W)12.70mm
 - Roller Outside Diameter (Dr)11.91mm
 - Tooth Width (T)11.3 mm (M)34.1mm
-  Carbon Structural Steel
  High-frequency Hardened Teeth

Type	No. of Teeth	Outer Diameter Do	Pitch Diameter Dp	Shaft Hole Diameter d			Boss Diameter BD	Boss Length BL	Shape	Weight kg	¥	Semi-F ¥
				Prepared Hole Product	Minimum	Maximum						
HG 60-2B	23H	150	139.90	20	21	66	100	56	Ground Specification	4.70		
	24H	156	145.95	20	21	80	120	56		6.00		
	25H	162	151.99	20	21	80	120	56		6.40		
	26H	168	158.04	20	21	80	120	56		6.80		
	27H	174	164.09	20	21	80	120	56		7.30		
	28H	180	170.14	20	21	80	120	56		7.80		
	30H	193	182.25	20	21	89	130	56		9.00		



Order Method

Sprocket No. and Quantity



Guide

* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.



Postage

Same-day shipping

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.