

HG80B




HG High-grade Sprocket with Hardened Teeth B-type

● Order No. Example

HG 80B 25H

Type No. of Teeth
 Sprocket No.

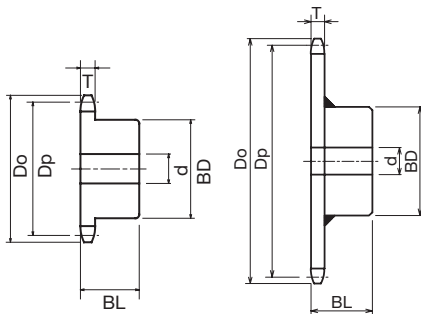

- ChainNo.80
- Chain Pitch(P)25.4 mm
- Roller Link Inner Width(W)15.88mm
- Roller Outside Diameter(Dr)15.88mm
- Tooth Width(T)14.6 mm

m Carbon Structural Steel

h High-frequency Hardened Teeth

Type	No. of Teeth	Outer Diameter Do	Pitch Diameter Dp	Shaft Hole Diameter d			Boss Diameter BD	Boss Length BL	Shape	Weight kg	¥	Semi-F ¥
				Prepared Hole Product	Minimum	Maximum						
HG 80B	22H	192	178.48	26	27	75	107	45	Ground Specification	5.00		
	23H	200	186.54	26	27	75	107	45		5.23		
	24H	208	194.60	26	27	75	107	45		5.50		
	25H	216	202.66	26	27	75	107	45		5.80		
	26H	224	210.72	26	27	75	107	45		6.10		
	27H	233	218.79	26	27	75	107	45		6.40		
	28H	241	226.86	26	27	75	107	45		6.75		
	30H	257	243.00	26	27	75	107	45	Welded Specification	7.40		
	32H	273	259.14	26	27	75	107	45		8.15		
	35H	297	283.36	26	27	75	107	45		9.30		
	36H	306	291.43	26	27	80	117	50		10.60		
	40H	338	323.74	26	27	80	117	50		12.40		
	42H	354	339.89	26	27	80	117	50		13.30		
	45H	378	364.12	26	27	80	117	50		14.90		



Order Method

Sprocket No. and Quantity



Postage

Same-day shipping



Guide

* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.