


NK40-2B

● Order Product Code

NK40-2B 15



- Chain**No.40**
- Chain Pitch**(P) 12.70 mm**
- Roller Link Inner Width**(W) 7.95 mm**
- Roller Outside Diameter**(Dr) 7.92 mm**
- Tooth Width**(T) 7.2 mm**
- Complete Tooth Width**(M) 21.4 mm**




Ground Specification



Welded Specification


(Black stain also mixed in)



Use together
with the KANA machine key.
Refer to P.334 to P.335

TYPE	No. of Teeth	Do	Dp	Shaft Hole Diameter d			BD	BL	Shape	Tooth Section	Weight kg
				Prepared Hole	Minimum	Maximum					
NK40-2B	10	47	41.098	10	11	16	28	35	Ground Specification	Carbon Structural Steel High-frequency Hardened Teeth	0.28
	11	51	45.078	10	11	16	30	35			0.30
	12	55	49.069	10	11	20	35	35			0.34
	13	59	53.068	13	14	22	39	35			0.40
	14	63	57.073	13	14	25	43	35			0.47
	15	67	61.084	13	14	28	47	35			0.55
	16	71	65.098	13	14	30	50	35			0.65
	17	76	69.116	13	14	32	54	35			0.75
	18	80	73.136	13	14	38	59	35			0.85
	19	84	77.159	13	14	42	63	35			0.98
	20	88	81.184	13	14	45	67	40			1.30
	21	92	85.211	13	14	45	68	40			1.30
	22	96	89.239	13	14	48	72	40			1.50
	23	100	93.268	13	14	51	76	40			1.60
	24	104	97.298	13	14	55	80	40			1.80
	25	108	101.330	13	14	57	84	40			2.00
	26	112	105.362	13	14	60	88	40			2.20
	27	116	109.395	16	17	60	92	40			2.30
	28	120	113.429	16	17	66	96	40			2.50
	29	124	117.463	16	17	66	96	40			2.65

Standard Sprocket Two-row B-type

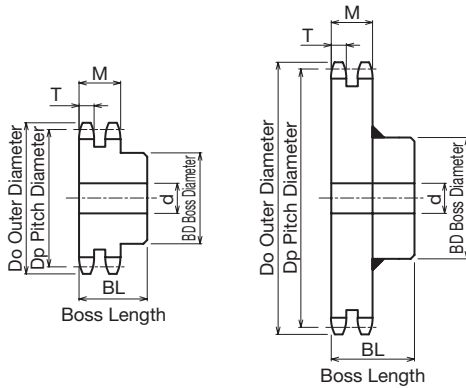

Ground Specification

Welded Specification

TYPE	No. of Teeth	Do	Dp	Shaft Hole Diameter d			BD	BL	Shape	Tooth Section	Weight kg
				Prepared Hole	Minimum	Maximum					
NK40-2B	30	128	121.498	16	17	66	100	40	Ground Specification	Carbon Structural Steel High-Frequency Hardened Teeth	2.80
	31	133	125.533	16	17	66	100	50			2.95
	32	137	129.569	16	17	66	100	50			3.05
	33	141	133.605	16	17	66	100	50			3.06
	34	145	137.642	16	17	66	100	50			3.08
	35	149	141.679	16	17	66	100	50			3.10
	36	153	145.716	16	17	66	100	50			3.30
	37	157	149.754	16	17	66	100	50			3.40
	38	161	153.791	16	17	66	100	50			3.50
	40	169	161.868	16	17	66	100	50			3.60
	42	177	169.945	16	17	63	93	50			4.00
	45	189	182.062	18	19	63	93	50			4.60
	48	201	194.180	18	19	63	93	50			5.00
	50	209	202.260	18	19	63	93	50			5.50
54	226	218.420	18	19	63	93	50	5.80			
60	250	242.663	18	19	63	93	50	6.70			
65	270	262.867	20	21	63	93	50	Welded Specification	Common Steel	10.20	
70	290	283.073	20	21	63	93	50	Welded Specification	Common Steel	11.50	