



NK40B

● Order Product Code

NK40B 20



Ground Specification



Machine Key



Welded Specification


(Black stain also mixed in)

- Chain **No.40**
- Chain Pitch **(P) 12.70 mm**
- Roller Link Inner Width **(W) 7.95 mm**
- Roller Outside Diameter **(Dr) 7.92 mm**
- Tooth Width **(T) 7.2 mm**

Use together
with the KANA machine key.
Refer to P.334 to P.335

TYPE	No. of Teeth	Do	Dp	Shaft Hole Diameter d			BD	BL	Shape	Tooth Section	Weight kg
				Prepared Hole	Minimum	Maximum					
NK40B	8	39	33.187	9	10	14	★28	22	Ground Specification	High-frequency Structural Hardened Steel	0.10
	9	43	37.132	9	10	16	★28	22			0.11
	10	47	41.098	9	10	18	★32	22			0.14
	11	51	45.078	10	11	20	★36	22			0.19
	12	55	49.069	10	11	22	★40	22			0.22
	13	59	53.068	12	13	20	37	22			0.23
	14	63	57.073	12	13	25	42	22			0.28
	15	67	61.084	12	13	28	46	22			0.34
	16	71	65.098	13	14	30	50	22			0.40
	17	76	69.116	13	14	32	54	22			0.46
	18	80	73.136	13	14	35	57	22			0.51
	19	84	77.159	14	15	40	62	22			0.59
	20	88	81.184	14	15	45	67	25			0.76
	21	92	85.211	14	15	48	71	25			0.85
	22	96	89.239	14	15	51	75	25			0.95
	23	100	93.268	14	15	51	77	25			1.00
	24	104	97.298	14	15	42	63	25			0.84
	25	108	101.330	14	15	42	63	25			0.88
	26	112	105.362	14	15	42	63	25			0.92
	27	116	109.395	14	15	42	63	25			0.96
	28	120	113.429	14	15	42	63	25			1.00
	29	124	117.463	14	15	42	63	25			1.00
	30	128	121.498	14	15	42	63	25			1.10
	31	133	125.533	14	15	45	68	28			1.20
	32	137	129.569	14	15	45	68	28			1.30
	33	141	133.605	14	15	45	68	28			1.30
	34	145	137.642	14	15	45	68	28			1.30
	35	149	141.679	14	15	45	68	28			1.40
	36	153	145.716	16	17	45	68	28			1.50
	37	157	149.754	16	17	45	68	28			1.55
	38	161	153.791	16	17	45	68	28			1.60
	39	165	157.830	16	17	45	68	28			1.65
	40	169	161.868	16	17	45	68	28			1.70

Standard Sprocket B-type

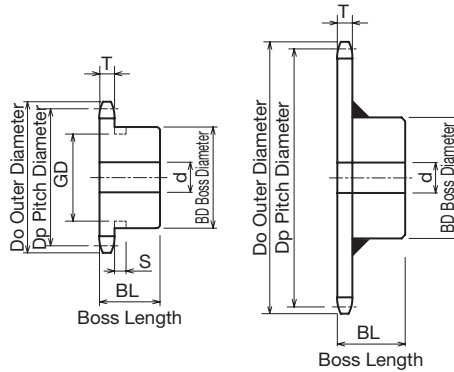

Ground Specification

Welded Specification

TYPE	No. of Teeth	Do	Dp	Shaft Hole Diameter d			BD	BL	Shape	Tooth Section	Weight kg
				Prepared Hole	Minimum	Maximum					
NK40B	41	173	165.906	16	17	48	73	32	Ground Specification	Carbon Structural Steel High-frequency Hardened Teeth	2.00
	42	177	169.945	16	17	48	73	32			2.05
	43	181	173.984	16	17	48	73	32			2.10
	44	185	178.023	16	17	48	73	32			2.17
	45	189	182.062	16	17	48	73	32			2.25
	46	193	186.101	16	17	48	73	32			2.30
	47	197	190.141	16	17	48	73	32			2.37
	48	201	194.180	16	17	48	73	32			2.45
	49	205	198.220	16	17	48	73	32			2.51
	50	209	202.260	16	17	48	73	32			2.60
	51	214	206.300	16	17	48	73	32			2.65
	52	218	210.340	16	17	48	73	32			2.72
	53	222	214.380	16	17	48	73	32			2.80
	54	226	218.420	16	17	48	73	32			2.90
	55	230	222.460	16	17	48	73	32			2.96
	56	234	226.501	16	17	48	73	32			3.04
	60	250	242.663	16	17	48	73	32			3.40
	64	266	258.826	16	17	48	73	32			3.73
	65	270	262.867	16	17	55	83	32			4.10
	68	282	274.990	16	17	55	83	32			4.35
70	290	283.073	16	17	55	83	32	4.57			
72	299	291.155	20	21	55	83	32	4.80			
75	311	303.279	20	21	55	83	32	5.10			
80	331	323.486	20	21	60	88	35	Common Steel	5.90		
85	351	343.694	20	21	60	88	35		6.50		
90	371	363.902	20	21	60	88	35		7.15		

! Sprockets with a ★ symbol for BD have a channel in the boss exterior.



No. of Teeth	S	GD
8		18
9	5.2	23
10		27
11	5.2	31
12	5.2	35