

KANA NK60B



●ご注文方法 商品コード

NK60B 20

TYPE 歯数


- チェーンNo.60
- チェーンピッチ(P)19.05mm
- ローリンク内幅(W)12.70mm
- ローラ外径(Dr)11.91mm
- 歯幅(T)11.9(最大) mm



削出仕様



溶接仕様

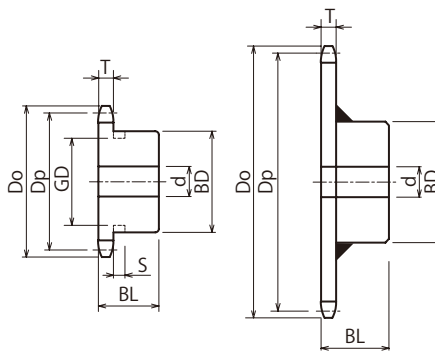

削出仕様

溶接仕様

商品コード	定価 (円)	SEMI-F 定価(円)	SEMI-FA/FAP 定価(円)	外径 Do	ピッチ径 Dp	軸穴径 d			ボス径 BD	ボス長さ BL	形状	歯部	質量 (kg)
						下穴	最小	最大					
NK60B8	930	3,900	3,300	58	49.780	12	13	20	★34	32	削出仕様	h m 歯先高周波焼入 機械構造用炭素鋼	0.30
NK60B9	850	3,800	3,200	64	55.698	12	13	25	★43	32			0.40
NK60B10	1,000	3,900	3,300	70	61.647	14	15	30	★49	32			0.49
NK60B11	1,000	3,900	3,300	76	67.617	14	15	32	★51	32			0.60
NK60B12	1,100	4,000	3,400	83	73.604	14	15	32	51	32			0.69
NK60B13	1,200	3,900	3,300	89	79.602	14	15	35	57	32			0.81
NK60B14	1,300	4,400	3,700	95	85.610	16	17	40	62	32			0.96
NK60B15	1,400	4,500	3,800	101	91.625	16	17	45	68	32			1.10
NK60B16	1,600	4,500	3,800	107	97.647	16	17	48	73	32			1.30
NK60B17	1,700	4,900	4,200	113	103.674	16	17	48	73	32			1.40
NK60B18	2,200	6,000	5,100	119	109.705	16	17	55	83	40			2.00
NK60B19	2,300	6,200	5,300	126	115.739	16	17	55	83	40			2.10
NK60B20	2,400	7,100	6,000	132	121.776	16	17	55	83	40			2.20
NK60B21	2,700	7,300	6,200	138	127.816	16	17	55	83	40			2.30
NK60B22	2,800	7,100	6,000	144	133.858	16	17	55	83	40			2.50
NK60B23	3,000	7,900	6,700	150	139.902	16	17	55	83	40			2.50
NK60B24	3,100	7,500	6,400	156	145.948	18	19	55	83	40			2.60
NK60B25	3,300	8,400	7,100	162	151.995	18	19	55	83	40			2.70
NK60B26	3,600	8,900	7,600	168	158.043	18	19	55	83	40			2.90
NK60B27	4,000	8,400	7,100	174	164.093	18	19	55	83	40			3.00
NK60B28	3,700	8,700	7,400	180	170.143	18	19	55	83	40	3.10		
NK60B29	4,600	9,600	8,200	187	176.195	18	19	55	83	40	3.30		
NK60B30	4,300	9,300	7,900	193	182.247	18	19	55	83	40	3.40		
NK60B31	5,300	11,400	9,700	199	188.300	20	21	55	83	40	3.64		
NK60B32	5,200	10,900	9,300	205	194.354	20	21	55	83	40	3.80		
NK60B33	5,700	13,200	11,200	211	200.408	20	21	55	83	40	4.00		
NK60B34	5,700	11,900	10,100	217	206.463	20	21	55	83	40	4.15		
NK60B35	5,900	12,400	10,500	223	212.518	20	21	55	83	40	4.33		
NK60B36	6,200	13,100	11,100	229	218.574	20	21	55	83	40	4.52		
NK60B37	8,100	15,400	13,100	235	224.631	20	21	55	83	40	4.70		
NK60B38	7,100	14,700	12,500	241	230.687	20	21	55	83	40	4.90		
NK60B39	8,800	15,100	12,800	247	236.744	20	21	55	83	40	5.10		
NK60B40	7,300	14,400	12,200	253	242.802	20	21	55	83	40	5.30		

商品コード	定価 (円)	SEMI-F 定価(円)	SEMI-FA/FAP 定価(円)	外径 Do	ピッチ径 Dp	軸穴径 d			ボス径 BD	ボス長さ BL	形状	歯部	質量 (kg)
						下穴	最小	最大					
NK60B41	11,900	18,100	15,400	260	248.859	20	21	63	93	45	削出仕様	h m 歯先高周波焼入 機械構造用炭素鋼	6.00
NK60B42	10,500	18,100	15,400	266	254.917	20	21	63	93	45			6.40
NK60B43	12,900	21,000	17,900	272	260.976	20	21	63	93	45			6.60
NK60B44	13,400	21,600	18,400	278	267.034	20	21	63	93	45			6.88
NK60B45	10,300	18,700	15,900	284	273.093	20	21	63	93	45			7.10
NK60B46	14,300	23,200	19,700	290	279.152	20	21	63	93	45			7.28
NK60B47	14,600	23,400	19,900	296	285.211	20	21	63	93	45			7.53
NK60B48	11,500	22,800	19,400	302	291.270	20	21	63	93	45			7.85
NK60B49	16,000	25,400	21,600	308	297.330	20	21	63	93	45			8.04
NK60B50	12,200	22,700	19,300	314	303.390	20	21	63	93	45			8.40
NK60B51	16,800	27,100	23,000	320	309.450	20	21	63	93	45	8.57		
NK60B52	16,500	26,800	22,800	326	315.510	20	21	63	93	45	8.84		
NK60B54	13,600	24,300	20,700	338	327.630	20	21	63	93	45	9.50		
NK60B55	17,800	28,300	24,100	345	333.691	20	21	63	93	45	9.69		
NK60B56	18,400	35,200	29,900	351	339.751	20	21	63	93	45	9.99		
NK60B58	19,500	36,200	30,800	363	351.873	20	21	63	93	45	10.59		
NK60B60	17,300	32,800	27,900	375	363.994	20	21	63	93	45	11.30		
NK60B64	24,700	41,100	34,900	399	388.239	26	27	63	93	45	12.50		
NK60B65	21,500	43,200	36,700	405	394.301	26	27	75	107	45	13.50		
NK60B70	24,400	45,300	38,500	436	424.609	26	27	75	107	45	15.30		
NK60B75	30,300	67,700	57,500	466	454.918	26	27	75	107	45	17.20		
NK60B80	39,800	78,100	66,400	496	485.229	26	27	80	117	50	20.00		
NK60B85	44,900	82,600	70,200	527	515.541	26	27	80	117	50	22.30		
NK60B90	45,500	82,900	70,500	557	545.853	26	27	80	117	50	24.60		

※SEMI-Fシリーズ<完成品>のご注文方法はP.40~P.53を参照ください。



BDに★印付のスプロケットはボス外形に溝があります。

歯数	S	GD
8	8.0	26
9		32
10		37
11		45