


SUS25B

SUS Stainless Steel Sprocket B-type

● Order Product Code

SUS25B 12

TYPE	No. of Teeth
Sprocket No.	

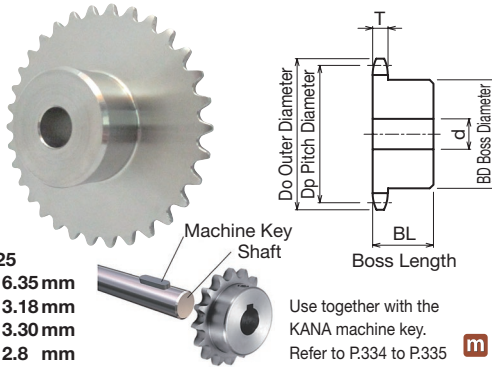

- Chain**No.25**
- Chain Pitch **(P) 6.35 mm**
- Bushing Link Inner Width ... **(W) 3.18 mm**
- Bushing Outside Diameter ... **(Dr) 3.30 mm**
- Tooth Width **(T) 2.8 mm**

Use together with the
KANA machine key.
Refer to P.334 to P.335

m Stainless Steel **GB** 304

TYPE	No. of Teeth	Do	Dp	Shaft Hole Diameter d			BD	BL	Shape	Weight kg
				Prepared Hole	Minimum	Maximum				
SUS25B	10	23	20.549	6	7	8	13	14	Ground Specification	0.01
	11	25	22.539	7	8	8	15	14		0.02
	12	28	24.535	7	8	10	17	14		0.02
	13	30	26.534	7	8	10	18	14		0.03
	14	32	28.537	7	8	10	19	14		0.03
	15	34	30.542	7	8	10	20	14		0.04
	16	36	32.549	9	10	11	21	16		0.06
	17	38	34.558	9	10	11	23	16		0.06
	18	40	36.568	9	10	12	25	16		0.07
	19	42	38.580	9	10	14	26	16		0.08
	20	44	40.592	9	10	16	28	16		0.09
	21	46	42.605	9	10	16	30	18		0.11
	22	48	44.619	9	10	16	30	18		0.11
	23	50	46.634	9	10	16	30	18		0.11
	24	52	48.649	9	10	16	30	18		0.12
	25	54	50.665	9	10	16	30	18		0.12
26	56	52.681	9	10	16	30	18	0.12		
27	58	54.698	9	10	16	30	18	0.13		
28	60	56.714	9	10	16	30	18	0.13		
30	64	60.749	9	10	16	30	18	0.14		
32	68	64.785	10	11	16	30	18	0.15		