


SUS40B

SUS Stainless Steel Sprocket B-type

● Order Product Code

SUS40B 20


TYPE No. of Teeth
Sprocket No.

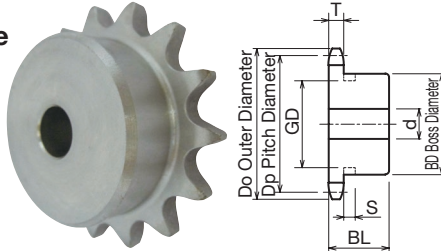

I Sprockets with a ★ symbol for BD have a channel in the boss exterior.

No. of Teeth	S	GD
9	5.2	23
10	5.2	27
11	5.2	31
12	5.2	35

- Chain **No.40**
- Chain Pitch **(P) 12.70 mm**
- Roller Link Inner Width **(W) 7.95 mm**
- Roller Outside Diameter **(Dr) 7.92 mm**
- Tooth Width **(T) 7.2 mm**



Use together with the KANA machine key. Refer to P.334 to P.335

m Stainless Steel **GB 304**

TYPE	No. of Teeth	Do	Dp	Shaft Hole Diameter d			BD	BL	Shape	Weight kg
				Prepared Hole	Minimum	Maximum				
SUS40B	9	43	37.132	9	10	16	★28	22	Ground Specification	0.11
	10	47	41.098	9	10	18	★32	22		0.14
	11	51	45.078	10	11	20	★36	22		0.19
	12	55	49.069	10	11	22	★40	22		0.22
	13	59	53.068	12	13	20	37	22		0.23
	14	63	57.073	12	13	25	42	22		0.28
	15	67	61.084	12	13	28	46	22		0.34
	16	71	65.098	13	14	30	50	22		0.40
	17	76	69.116	13	14	32	54	22		0.46
	18	80	73.136	13	14	35	57	22		0.51
	19	84	77.159	14	15	40	62	22		0.59
	20	88	81.184	14	15	45	67	25		0.76
	21	92	85.211	14	15	48	71	25		0.85
	22	96	89.239	14	15	51	75	25		0.95
	23	100	93.268	14	15	51	77	25		1.00
	24	104	97.298	14	15	42	63	25		0.84
	25	108	101.330	14	15	42	63	25		0.88
	26	112	105.362	14	15	42	63	25		0.92
	27	116	109.395	14	15	42	63	25		0.96
	28	120	113.429	14	15	42	63	25		1.00
30	128	121.498	14	15	42	63	25	1.10		
32	137	129.569	14	15	45	68	28	1.30		
34	145	137.642	14	15	45	68	28	1.30		
35	149	141.679	14	15	45	68	28	1.40		
36	153	145.716	16	17	45	68	28	1.50		
38	161	153.791	16	17	45	68	28	1.60		
40	169	161.868	16	17	45	68	28	1.70		