


SUSFBN60B

● Order Product Code

SUSFBN60B 18 D28



- Chain **No.60**
- Chain Pitch **(P) 19.05mm**
- Roller Link Inner Width **(W) 12.70mm**
- Roller Outside Diameter **(Dr) 11.91mm**
- Tooth Width **(T) 11.7 mm**



! Sprockets with a ★ symbol for BD have a channel in the boss exterior.


No. of Teeth	S	GD
10		37
11	8.0	45

m Stainless Steel **GB**304


TYPE	SUSFBN60B									
Product Code	No. of Teeth	ϕ D ^{H7}	Keyway b×t ²	M	Do	Dp	BD	BL	a	Weight kg
SUSFBN60B10D20	10	20	6×2.8	6	68	61.65	★49	32	6	0.49
SUSFBN60B10D22	10	22	6×2.8	6	68	61.65	★49	32	6	0.49
SUSFBN60B10D25	10	25	8×3.3	8	68	61.65	★49	32	6	0.49
SUSFBN60B11D20	11	20	6×2.8	6	76	67.62	★51	32	6	0.60
SUSFBN60B11D22	11	22	6×2.8	6	76	67.62	★51	32	6	0.60
SUSFBN60B11D25	11	25	8×3.3	8	76	67.62	★51	32	6	0.60
SUSFBN60B12D20	12	20	6×2.8	6	83	73.60	51	32	8	0.69
SUSFBN60B12D22	12	22	6×2.8	6	83	73.60	51	32	8	0.69
SUSFBN60B12D25	12	25	8×3.3	8	83	73.60	51	32	8	0.69
SUSFBN60B13D20	13	20	6×2.8	6	89	79.60	57	32	8	0.81
SUSFBN60B13D22	13	22	6×2.8	6	89	79.60	57	32	8	0.81
SUSFBN60B13D25	13	25	8×3.3	8	89	79.60	57	32	8	0.81
SUSFBN60B13D28	13	28	8×3.3	8	89	79.60	57	32	8	0.81
SUSFBN60B14D20	14	20	6×2.8	6	95	85.61	62	32	8	0.96
SUSFBN60B14D22	14	22	6×2.8	6	95	85.61	62	32	8	0.96
SUSFBN60B14D25	14	25	8×3.3	8	95	85.61	62	32	8	0.96
SUSFBN60B14D28	14	28	8×3.3	8	95	85.61	62	32	8	0.96
SUSFBN60B15D20	15	20	6×2.8	6	101	91.62	68	32	8	1.10
SUSFBN60B15D22	15	22	6×2.8	6	101	91.62	68	32	8	1.10
SUSFBN60B15D25	15	25	8×3.3	8	101	91.62	68	32	8	1.10
SUSFBN60B15D28	15	28	8×3.3	8	101	91.62	68	32	8	1.10
SUSFBN60B15D30	15	30	8×3.3	8	101	91.62	68	32	8	1.10
SUSFBN60B15D32	15	32	10×3.3	8	101	91.62	68	32	8	1.10
SUSFBN60B15D35	15	35	10×3.3	8	101	91.62	68	32	8	1.10
SUSFBN60B15D38	15	38	10×3.3	8	101	91.62	68	32	8	1.10
SUSFBN60B16D25	16	25	8×3.3	8	107	97.65	73	32	8	1.30
SUSFBN60B16D28	16	28	8×3.3	8	107	97.65	73	32	8	1.30
SUSFBN60B16D30	16	30	8×3.3	8	107	97.65	73	32	8	1.30
SUSFBN60B16D32	16	32	10×3.3	8	107	97.65	73	32	8	1.30
SUSFBN60B16D35	16	35	10×3.3	8	107	97.65	73	32	8	1.30
SUSFBN60B16D38	16	38	10×3.3	8	107	97.65	73	32	8	1.30
SUSFBN60B17D25	17	25	8×3.3	8	113	103.67	73	32	8	1.40
SUSFBN60B17D28	17	28	8×3.3	8	113	103.67	73	32	8	1.40
SUSFBN60B17D30	17	30	8×3.3	8	113	103.67	73	32	8	1.40
SUSFBN60B17D32	17	32	10×3.3	8	113	103.67	73	32	8	1.40
SUSFBN60B17D35	17	35	10×3.3	8	113	103.67	73	32	8	1.40
SUSFBN60B17D38	17	38	10×3.3	8	113	103.67	73	32	8	1.40

*M is a set screw. * The seal set screws differ from the usual due to the boss type.

SUS FBN Finished Bore Sprocket New JIS Keyway Specification



Use together with the KANA machine key. Refer to P.334 to P.335

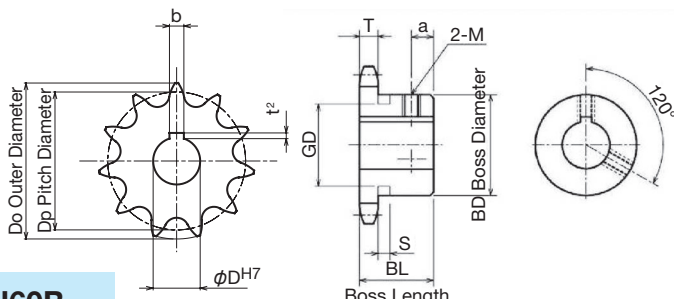

Stainless Steel **GB304**

TYPE	SUSFBN60B									
Product Code	No. of Teeth	ϕD^{H7}	Keyway $b \times t^2$	M	Do	Dp	BD	BL	a	Weight kg
SUSFBN60B18D25	18	25	8×3.3	8	119	109.71	83	40	12	2.00
SUSFBN60B18D28	18	28	8×3.3	8	119	109.71	83	40	12	2.00
SUSFBN60B18D30	18	30	8×3.3	8	119	109.71	83	40	12	2.00
SUSFBN60B18D32	18	32	10×3.3	8	119	109.71	83	40	12	2.00
SUSFBN60B18D35	18	35	10×3.3	8	119	109.71	83	40	12	2.00
SUSFBN60B18D38	18	38	10×3.3	8	119	109.71	83	40	12	2.00
SUSFBN60B18D40	18	40	12×3.3	8	119	109.71	83	40	12	2.00
SUSFBN60B19D25	19	25	8×3.3	8	126	115.74	83	40	12	2.10
SUSFBN60B19D28	19	28	8×3.3	8	126	115.74	83	40	12	2.10
SUSFBN60B19D30	19	30	8×3.3	8	126	115.74	83	40	12	2.10
SUSFBN60B19D32	19	32	10×3.3	8	126	115.74	83	40	12	2.10
SUSFBN60B19D35	19	35	10×3.3	8	126	115.74	83	40	12	2.10
SUSFBN60B19D38	19	38	10×3.3	8	126	115.74	83	40	12	2.10
SUSFBN60B19D40	19	40	12×3.3	8	126	115.74	83	40	12	2.10
SUSFBN60B20D25	20	25	8×3.3	8	132	121.78	83	40	12	2.20
SUSFBN60B20D28	20	28	8×3.3	8	132	121.78	83	40	12	2.20
SUSFBN60B20D30	20	30	8×3.3	8	132	121.78	83	40	12	2.20
SUSFBN60B20D32	20	32	10×3.3	8	132	121.78	83	40	12	2.20
SUSFBN60B20D35	20	35	10×3.3	8	132	121.78	83	40	12	2.20
SUSFBN60B20D38	20	38	10×3.3	8	132	121.78	83	40	12	2.20
SUSFBN60B20D40	20	40	12×3.3	8	132	121.78	83	40	12	2.20
SUSFBN60B21D30	21	30	8×3.3	8	138	127.82	83	40	12	2.30
SUSFBN60B21D35	21	35	10×3.3	8	138	127.82	83	40	12	2.30
SUSFBN60B21D40	21	40	12×3.3	8	138	127.82	83	40	12	2.30
SUSFBN60B22D30	22	30	8×3.3	8	144	133.86	83	40	12	2.50
SUSFBN60B22D35	22	35	10×3.3	8	144	133.86	83	40	12	2.50
SUSFBN60B22D40	22	40	12×3.3	8	144	133.86	83	40	12	2.50
SUSFBN60B23D30	23	30	8×3.3	8	150	139.90	83	40	12	2.50
SUSFBN60B23D35	23	35	10×3.3	8	150	139.90	83	40	12	2.50
SUSFBN60B23D40	23	40	12×3.3	8	150	139.90	83	40	12	2.50
SUSFBN60B24D30	24	30	8×3.3	8	156	145.95	83	40	12	2.60
SUSFBN60B24D35	24	35	10×3.3	8	156	145.95	83	40	12	2.60
SUSFBN60B24D40	24	40	12×3.3	8	156	145.95	83	40	12	2.60
SUSFBN60B25D30	25	30	8×3.3	8	162	151.99	83	40	12	2.70
SUSFBN60B25D35	25	35	10×3.3	8	162	151.99	83	40	12	2.70
SUSFBN60B25D40	25	40	12×3.3	8	162	151.99	83	40	12	2.70
SUSFBN60B30D30	30	30	8×3.3	8	193	182.25	83	40	12	3.30
SUSFBN60B30D35	30	35	10×3.3	8	193	182.25	83	40	12	3.30
SUSFBN60B30D40	30	40	12×3.3	8	193	182.25	83	40	12	3.30

*M is a set screw. * The seal set screws differ from the usual due to the boss type.