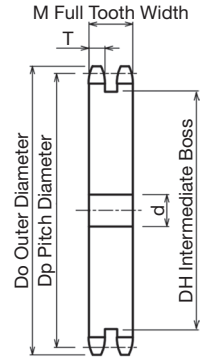



# HG60-2A

## HG High-grade Sprocket with Hardened Teeth Two-row A-type

### ● Order Product Code

**HG60-2A 35H**

- Chain ..... **No.60-2**
- Chain Pitch ..... **(P) 19.05 mm**
- Roller Link Inner Width ..... **(W) 12.70 mm**
- Roller Outside Diameter ..... **(Dr) 11.91 mm**
- Tooth Width ..... **(T) 11.3 mm**
- Complete Tooth Width ..... **(M) 34.1 mm**

**m** Carbon Structural Steel**h** High-frequency Hardened Teeth

TYPE	No. of Teeth	Do	Dp	Shaft Hole Diameter d		DH	M	Shape	Weight kg
				Prepared Hole	Minimum				
<b>HG60-2A</b>	35H	223	212.518	20	21	192	34.1	Ground Specification	8.89
	36H	229	218.574	20	21	198	34.1		9.38
	38H	241	230.687	20	21	210	34.1		10.51
	40H	253	242.802	20	21	222	34.1		11.97
	42H	266	254.917	23	24	234	34.1		12.91
	45H	284	273.093	23	24	253	34.1		14.90
	48H	302	291.270	23	24	271	34.1		17.08
	50H	314	303.390	23	24	283	34.1		18.55
60H	375	363.994	23	24	344	34.1	26.97		